

PHJCS50N06H

主要参数 MAIN CHARACTERISTICS

ID	50 A
V _{DSS}	60 V
R _{dson-max} (@V _{gs} =10V)	23 mΩ
Q _{g-typ}	34 nC

用途

- 高频开关电源
- UPS 电源
- UPS

APPLICATIONS

- High frequency switch mode power supplies
- UPS


产品特性

- 低栅极电荷
- 低 C_{rss}
- 开关速度快
- 产品全部经过雪崩测试
- 高抗 dv/dt 能力
- RoHS 产品

FEATURES

- Low gate charge
- Low C_{rss}
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability
- RoHS product

封装 Package

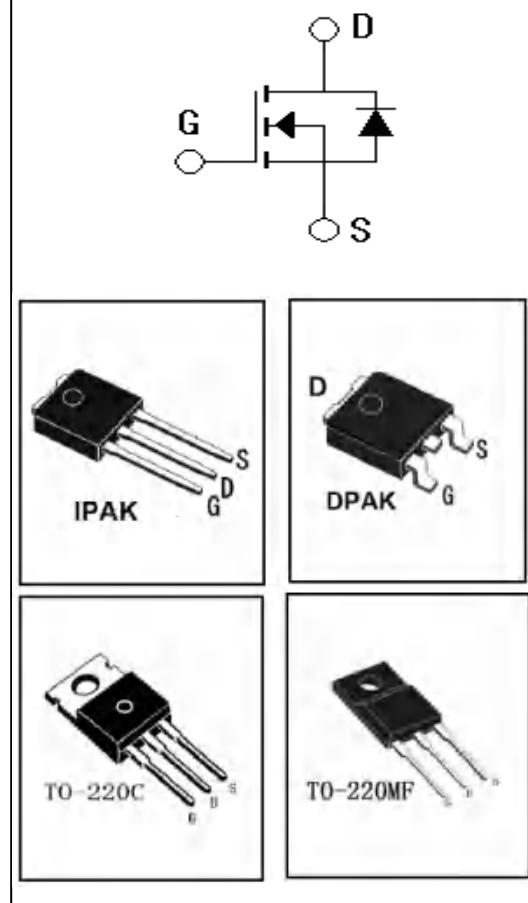

订货信息 ORDER MESSAGE

订货型号 Order codes				印 记 Marking	封 装 Package
有卤-条管 Halogen-Tube	无卤-条管 Halogen-Free-Tube	有卤-编带 Halogen-Reel	无卤-编带 Halogen-Free-Reel		
JCS50N06VH-V-B	JCS50N06VH-V-BR	N/A	N/A	JCS50N06VH	IPAK
JCS50N06RH-R-B	JCS50N06RH-R-BR	JCS50N06RH-R-A	JCS50N06RH-R-AR	JCS50N06RH	DPAK
JCS50N06CH-C-B	JCS50N06CH-C-BR	N/A	N/A	JCS50N06CH	TO-220C
JCS50N06FH-F-B	JCS50N06FH-F-BR	N/A	N/A	JCS50N06FH	TO-220MF

绝对最大额定值 ABSOLUTE RATINGS (T_c=25°C)

项 目 Parameter	符 号 Symbol	数 值 Value			单 位 Unit
		JCS50N06RH/VH	JCS50N06CH	JCS50N06FH	
最高漏极—源极直流电压 Drain-Source Voltage	V _{DSS}	60			V
连续漏极电流 Drain Current -continuous	I _D T=25°C	50		50*	A
	T=100°C	31.7		31.7*	A
最大脉冲漏极电流(注 1) Drain Current – pulse (note 1)	I _{DM}	200*			A
最高栅源电压 Gate-Source Voltage	V _{GSS}	±20			V
单脉冲雪崩能量(注 2) Single Pulsed Avalanche Energy (note 2)	E _{AS}	500			mJ
雪崩电流(注 1) Avalanche Current (note 1)	I _{AR}	50			A
重复雪崩能量(注 1) Repetitive Avalanche Energy (note 1)	E _{AR}	8.75	10.3	5.6	mJ
二极管反向恢复最大电压变化速率 (注 3) Peak Diode Recovery dv/dt (note 3)	dv/dt	7.0			V/ns
耗散功率 Power Dissipation	P _D T _c =25°C -Derate above 25°C	87.5	103.8	56	W
		0.70	0.83	0.45	W/°C
最高结温及存储温度 Operating and Storage Temperature Range	T _J , T _{STG}	-55~+150			°C
引线最高焊接温度 Maximum Lead Temperature for Soldering Purposes	T _L	300			°C

*漏极电流由最高结温限制

*Drain current limited by maximum junction temperature

电特性 ELECTRICAL CHARACTERISTICS

项目 Parameter	符号 Symbol	测试条件 Tests conditions	最小 Min	典型 Typ	最大 Max	单位 Units
关态特性 Off -Characteristics						
漏一源击穿电压 Drain-Source Voltage	BV_{DSS}	$I_D=250\mu A, V_{GS}=0V$	60	-	-	V
击穿电压温度特性 Breakdown Voltage Temperature Coefficient	$\Delta BV_{DSS}/\Delta T_J$	$I_D=250\mu A$, referenced to $25^\circ C$	-	0.6	-	V/ $^\circ C$
零栅压下漏极漏电流 Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=60V, V_{GS}=0V, T_C=25^\circ C$	-	-	1	μA
		$V_{DS}=48V, T_C=125^\circ C$	-	-	10	μA
正向栅极体漏电流 Gate-body leakage current, forward	I_{GSSF}	$V_{DS}=0V, V_{GS}=30V$	-	-	100	nA
反向栅极体漏电流 Gate-body leakage current, reverse	I_{GSSR}	$V_{DS}=0V, V_{GS}=-30V$	-	-	-100	nA
通态特性 On-Characteristics						
阈值电压 Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	2.0	-	4.0	V
静态导通电阻 Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=25A$	-	19	23	$m\Omega$
正向跨导 Forward Transconductance	g_{fs}	$V_{DS}=30V, I_D=25A$ (note 4)	-	30	-	S
动态特性 Dynamic Characteristics						
输入电容 Input capacitance	C_{iss}	$V_{DS}=25V,$ $V_{GS}=0V,$ $f=1.0MHz$	-	900	1125	pF
输出电容 Output capacitance	C_{oss}		-	430	540	pF
反向传输电容 Reverse transfer capacitance	C_{rss}		-	80	100	pF

电特性 ELECTRICAL CHARACTERISTICS

开关特性 Switching Characteristics							
延迟时间 Turn-On delay time	$t_{d(on)}$	$V_{DD}=30V, I_D=50A, R_G=50\Omega$ $V_{GS}=10V$ (note 4, 5)	-	40	90	ns	
上升时间 Turn-On rise time	t_r		-	100	210	ns	
延迟时间 Turn-Off delay time	$t_{d(off)}$		-	90	190	ns	
下降时间 Turn-Off Fall time	t_f		-	80	170	ns	
栅极电荷总量 Total Gate Charge	Q_g	$V_{DS}=48V$, $I_D=50A$ $V_{GS}=10V$ (note 4, 5)	-	34	45	nC	
栅一源电荷 Gate-Source charge	Q_{gs}		-	7	-	nC	
栅一漏电荷 Gate-Drain charge	Q_{gd}		-	17	-	nC	
漏一源二极管特性及最大额定值 Drain-Source Diode Characteristics and Maximum Ratings							
正向最大连续电流	I_S			-	-	50 A	
Maximum Continuous Drain-Source Diode Forward Current	I_S			-	-	50 A	
正向最大脉冲电流	I_{SM}			-	-	200 A	
Maximum Pulsed Drain-Source Diode Forward Current	I_{SM}			-	-	200 A	
正向压降	V_{SD}	$V_{GS}=0V, I_S=50A$	-	1.4	V		
Drain-Source Diode Forward Voltage							
反向恢复时间	t_{rr}	$V_{GS}=0V, I_S=50A$	-	50	-	ns	
Reverse recovery time							
反向恢复电荷	Q_{rr}	$dI_F/dt=100A/\mu s$ (note 4)	-	80	-	nC	
Reverse recovery charge							

热特性 THERMAL CHARACTERISTIC

项 目 Parameter	符 号 Symbol	最大 Max			单 位 Unit
		JCS50N06RH/VH	JCS50N06CH	JCS50N06FH	
结到管壳的热阻 Thermal Resistance, Junction to Case	$R_{th(j-c)}$	1.43	1.20	2.22	°C/W
结到环境的热阻 Thermal Resistance, Junction to Ambient	$R_{th(j-A)}$	62.5			°C/W

注释:


- 1: 脉冲宽度由最高结温限制
- 2: $L=0.4mH, I_{AS}=50A, V_{DD}=25V, R_G=25\Omega$, 起始
结温 $T_J=25^\circ C$
- 3: $I_{SD} \leq 50A, di/dt \leq 300A/\mu s, V_{DD} \leq BV_{DSS}$, 起始结温
 $T_J=25^\circ C$
- 4: 脉冲测试: 脉冲宽度 $\leq 300\mu s$, 占空比 $\leq 2\%$
- 5: 基本与工作温度无关

Notes:


- 1: Pulse width limited by maximum junction temperature
- 2: $L=0.4mH, I_{AS}=50A, V_{DD}=25V, R_G=25\Omega$, Starting
 $T_J=25^\circ C$
- 3: $I_{SD} \leq 50A, di/dt \leq 300A/\mu s, V_{DD} \leq BV_{DSS}$, Starting
 $T_J=25^\circ C$
- 4: Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$
- 5: Essentially independent of operating temperature

特征曲线 ELECTRICAL CHARACTERISTICS (curves)


On-Region Characteristics

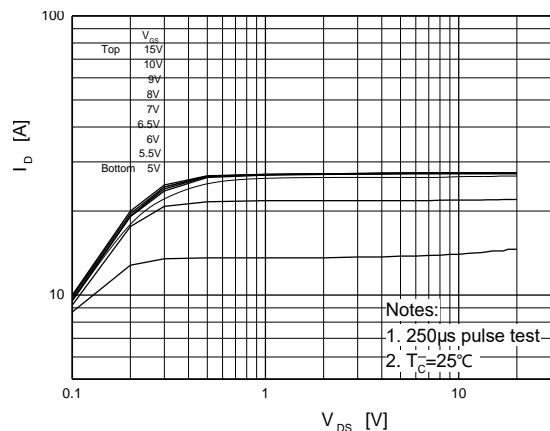


Transfer Characteristics

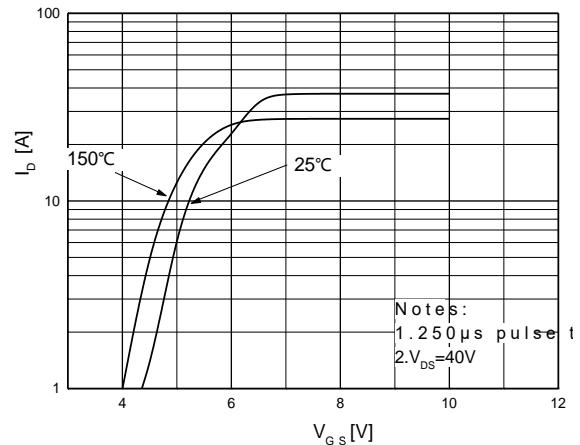


On-Resistance Variation vs. Drain Current and Gate Voltage

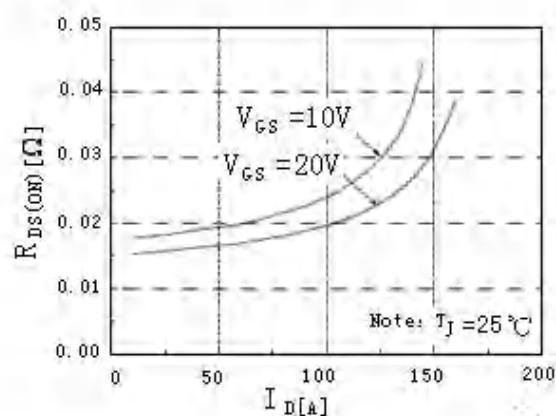


Body Diode Forward Voltage Variation vs. Source Current and Temperature

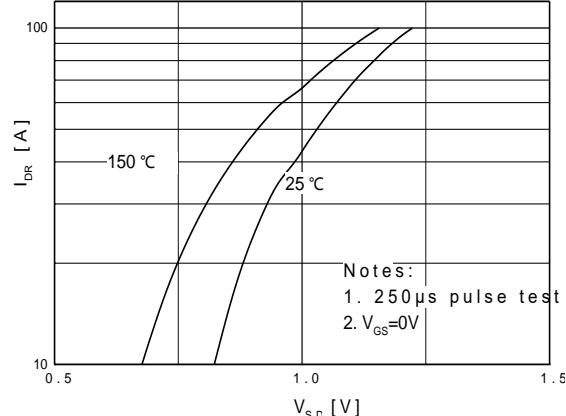

Capacitance Characteristics

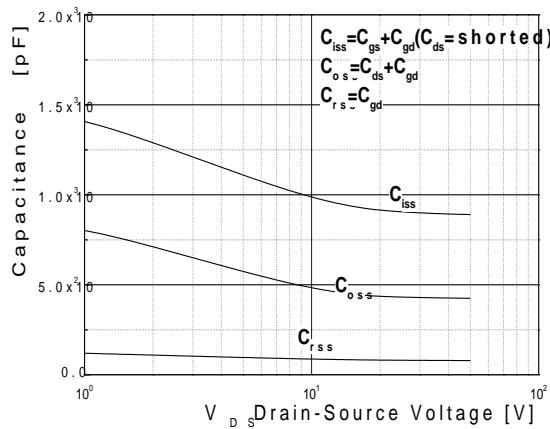


Gate Charge Characteristics

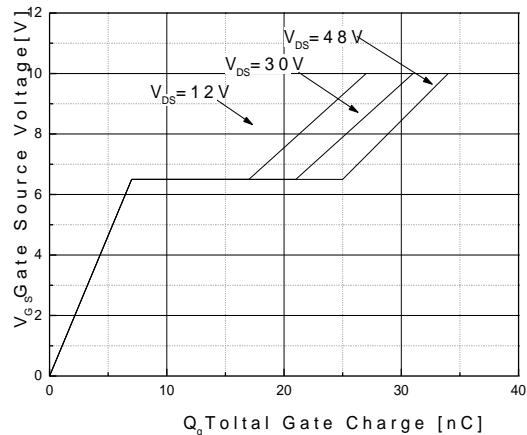


特征曲线 ELECTRICAL CHARACTERISTICS (curves)


Maximum Drain Current vs. Case Temperature

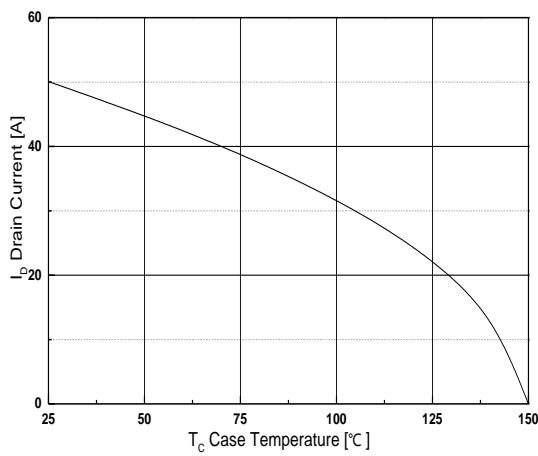


Maximum Safe Operating Area JCS50N06CH/RH/VH

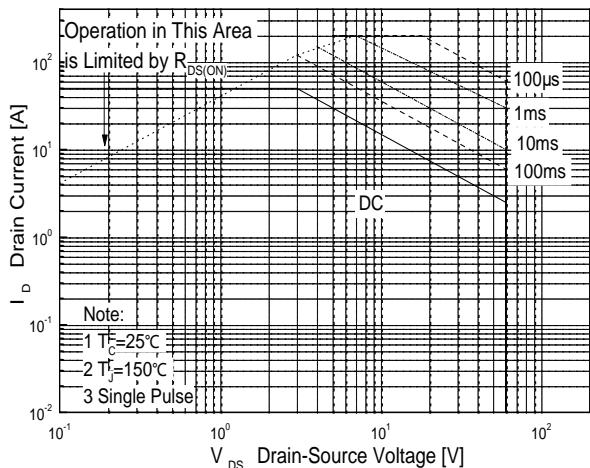


Maximum Safe Operating Area JCS50N06FH

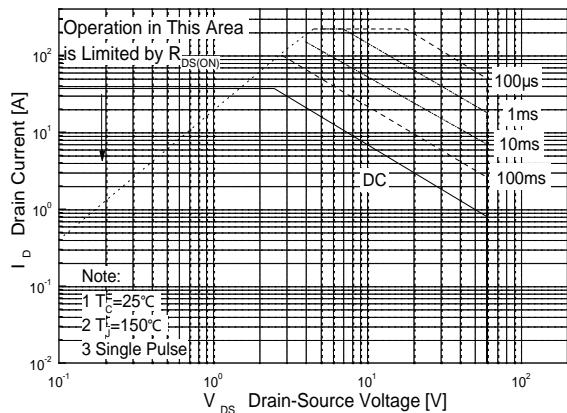


Transient Thermal Response Curve JCS50N06CH

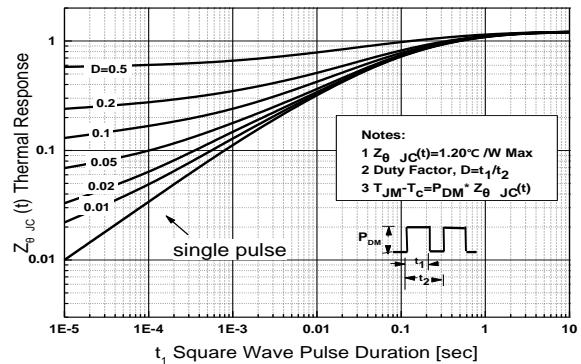

Transient Thermal Response Curve JCS50N06VH/RH

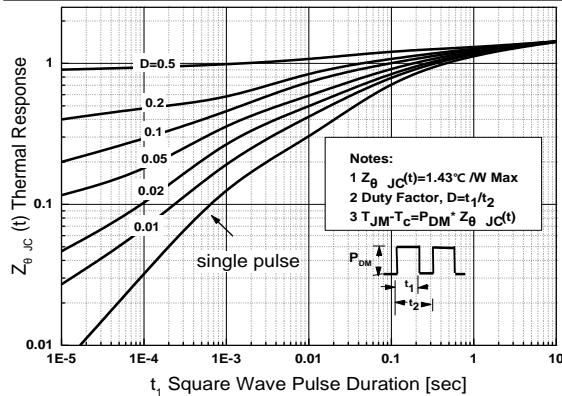


Transient Thermal Response Curve JCS50N06FH

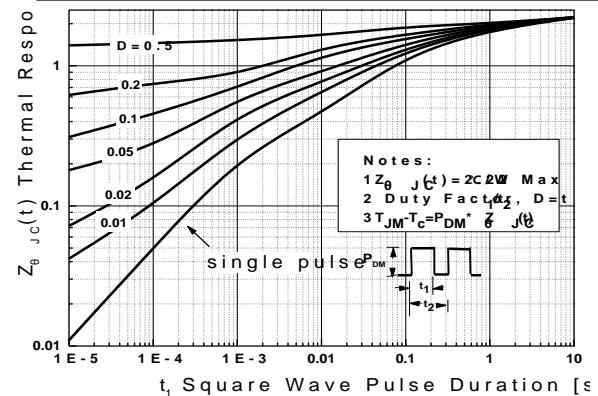


外形尺寸 PACKAGE MECHANICAL DATA

TO-220C

单位 Unit: mm

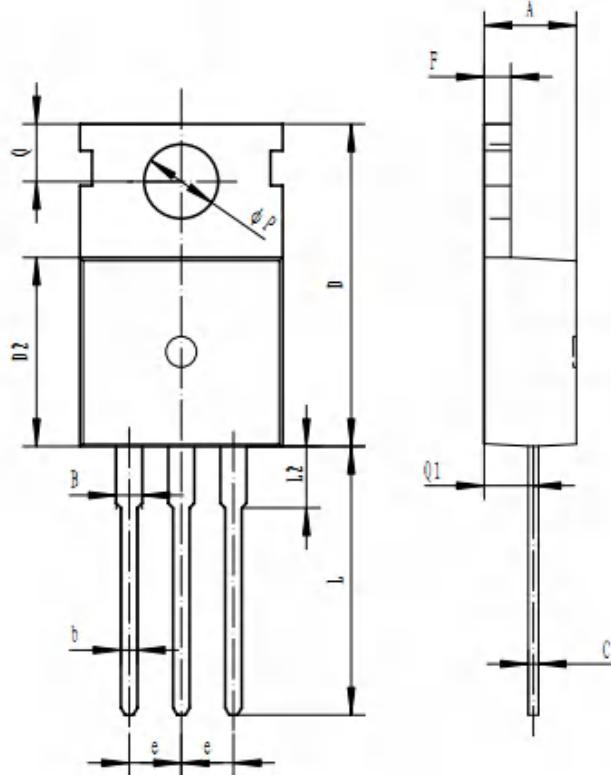


符号 symbol	MIN	MAX
A	4.30	4.70
B	1.22	1.40
b	0.70	0.95
c	0.40	0.65
D	15.20	16.20
D ₂	9.00	9.40
E	9.70	10.10
e	2.39	2.69
F	1.25	1.40
L	12.60	13.60
L ₂	2.80	3.20
Q	2.60	3.00
Q ₁	2.20	2.60
P	3.50	3.80




外形尺寸 PACKAGE MECHANICAL DATA

TO-220MF

单位 Unit: mm

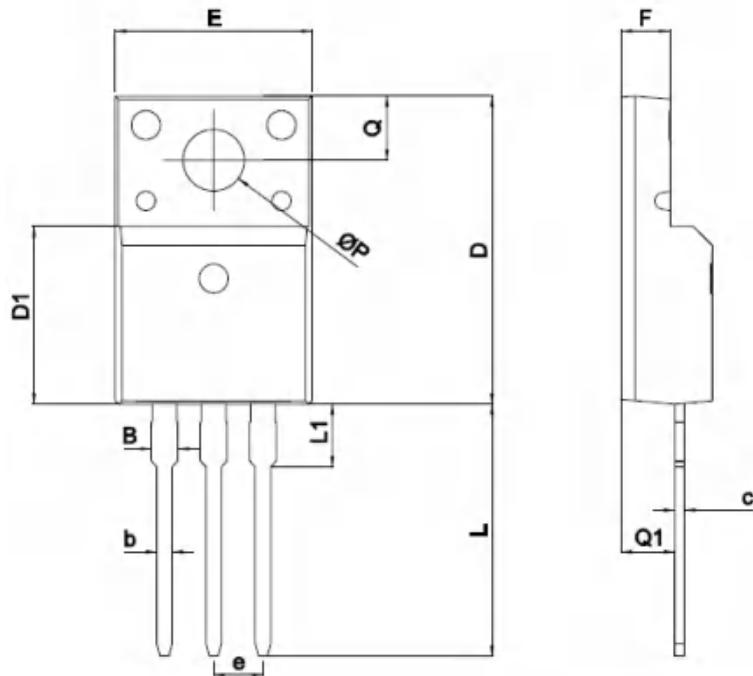



SYMBOL	mm	
	MIN	MAX
A	4.5	4.9
B		1.47
b	0.7	0.9
c	0.45	0.60
D	15.67	16.07
D1	9.04	9.20
e	2.54TYPE	
E	9.96	10.36
F	2.34	2.74
L	12.58	13.38
L1	3.13	3.33
Q	3.2	3.4
Q1	2.56	2.96
ΦP	3.08	3.28



外形尺寸 PACKAGE MECHANICAL DATA

I-PAK

单位 Unit: mm


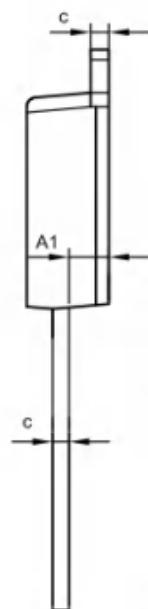
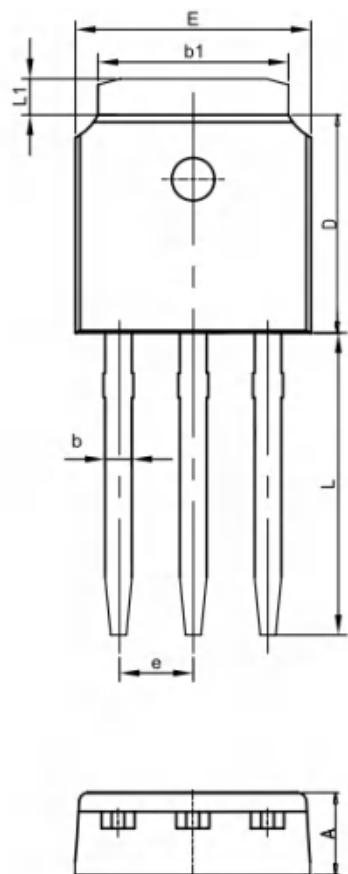


SYMBOL	MM	
	MIN	MAX
A	2.1	2.5
A1	0.87	1.27
b	0.63	0.93
b1	5.13	5.53
c	0.40	0.60
D	5.80	6.40
E	6.30	6.90
L	9.10	9.70
e	2.286BSC	
L1	0.82	1.22

外形尺寸 PACKAGE MECHANICAL DATA

DPAK

单位 Unit: mm

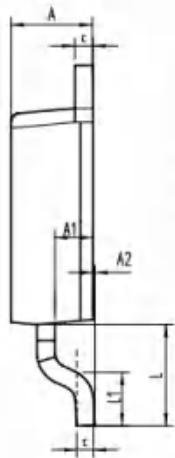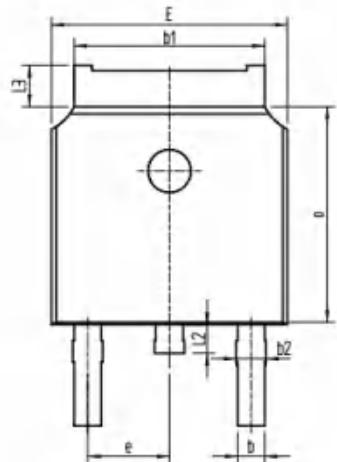

SYMBOL	mm	
	MIN	MAX
A	2.16	2.41
A1	0.97	1.17
A2	0.00	0.15
b	0.63	0.93
b1	5.13	5.53
b2	0.66	0.96
c	0.40	0.60
D	5.80	6.40
E	6.30	6.90
e	2.286BSC	
L	2.50	3.30
L1	1.20	1.80
L2	0.60	1.00
L3	0.85	1.30